



Features

- Fanless Industry Embedded platform
- Intel® Atom N270 1.6 GHz Processor, 533 MHz FSB
- Intel® 945GSE North & ICH 7-M South Bridge Chipset
- On board DDR 2 memory + SODIMM, up to 2 GB w/o ECC
- 1 Mini PCI & 1 Mini PCI-E expansion slot
- Dual CF, 1 removable & 1 internal CF slot
- Support 2 RS-232/485 and 6 RS-232
- DC 9V ~ 30V power input

Cable-Free

Specifications

Fanless Platform

- Low power, low operation temperature
- Fanless Aluminum Alloy Embedded System

Dimension

- 208 (W) x 66.5 (H) x 230 (D) mm, Compact size

Processor

- Support Intel® Atom N270 1.6 GHz low power Processor
- 437 pins package, 533 MHz FSB, 512KB L2 Cache

Chipset

- Intel® 945GSE North & ICH 7-M South Bridge Chipset

Memory

- On board 512MB + 1 SODIMM Socket, up to 2 GB w/o ECC, 533 MHz DDR 2 Memory

BIOS

- Award System BIOS
- Support Console Redirection & Power On After Power failure

Disk Drive Storage

- 1 channel SATA interface + 1 internal CF module slot
- 1 external Hot Swappable CF

Expansion

- 1 Mini PCI + 1 Mini PCI-E expansion slot

Ethernet

- 1 Realtek 8111C 100/1000 Mbps LAN interface with Wake-On-LAN & DMI

Watchdog Timer

- Programmable WDT from 1 to 255 seconds

Display Function

- Support high resolution VGA display

Hardware Monitor

- Monitors Voltage, Temperature

Support RTC & CMOS RAM

- Support Real Time Clock feature
- 256 bytes CMOS RAM built-in chipset

Audio

- ALC662-GR Codec supports Speaker-out

Super I/O

- ITE 8712 & Fintek 81216 Super I/O for KB, MS, COM, Thermal monitor, Voltage monitor

RS-232 / 485 Support

- 2 DB-9 RS-232/485, 6 DB-9 RS-232 w/ optional DC output

Smart Battery Interface

- Support DC output & Smbus for Smart Battery Kit

Support Digital I/O w/ Isolation Protection

- 3 D-In, supports Dry / Wet contact, low level 0~3V, High level 10 ~ 50V. 2500V isolation protection
- 2 D-Out, 500 mA drive capability. 2500V isolation protection

Front Panel Extend I/O

- 4 DB-9 for RS-232, 2 USB, 4 LED
- 1 Hot Swappable CF slot, Power switch & Reset

Rear Panel Extend I/O

- Screw-Lock DC 9 ~ 30V power input, 3-pin connector
- 2 DB-9 for RS-232/485, 2 DB-9 for RS-232
- 1 DB-9 for 3 D-in + 2 D-out, 1 DB-15 for VGA
- 4 USB, 1 RJ-45 100/1000 Mbit LAN connector
- 1 Speaker out connector
- Power LED + HDD LED, 1 Power button

Internal I/O Interface

- 1 Mini PCI + 1 Mini PCI-E expansion slot
- 1 CF slot, 1 SATA storage interface
- Total up to 4 D-In, 4 D-Out internal connector
- 1 x 5.1 channel Audio, CD-in, pin header
- 1 x dual channel 18-bit LVDS connector

Power Supply

- DC: 9V~30V / 1.5~5 A input

Power ON/OFF Mode

- AT or ATX Power ON/OFF mode

Environment

- Operation Temperature: -20°C ~ 50°C
- Storage Temperature: -40°C ~ 80°C
- Relative humidity: 10% ~ 90% (Non-condensing)

Certification

- CE Class A
- FCC Class A

Ordering Guide


Specifications subject to change without notice

Ordering No.	CPU	Memory	LAN / USB / CF	DB-9 RS-232/485	PCI-32 slot	GPS/HSDPA	Isolation D-I/O
Pipal 2040U-835	N270 1.6GHz	512MB	1 GE/ 6 USB/ 2 CF	232/485x2, 232x6	N/A	N/A	3 D-IN , 2 D-OUT

Optional order :

- 60W / 120W Power Adapter , HDD , SODIMM Memory
- Wireless LAN Module , Anti-Vibration HDD drive bay

Pipal 2040U rear I/O

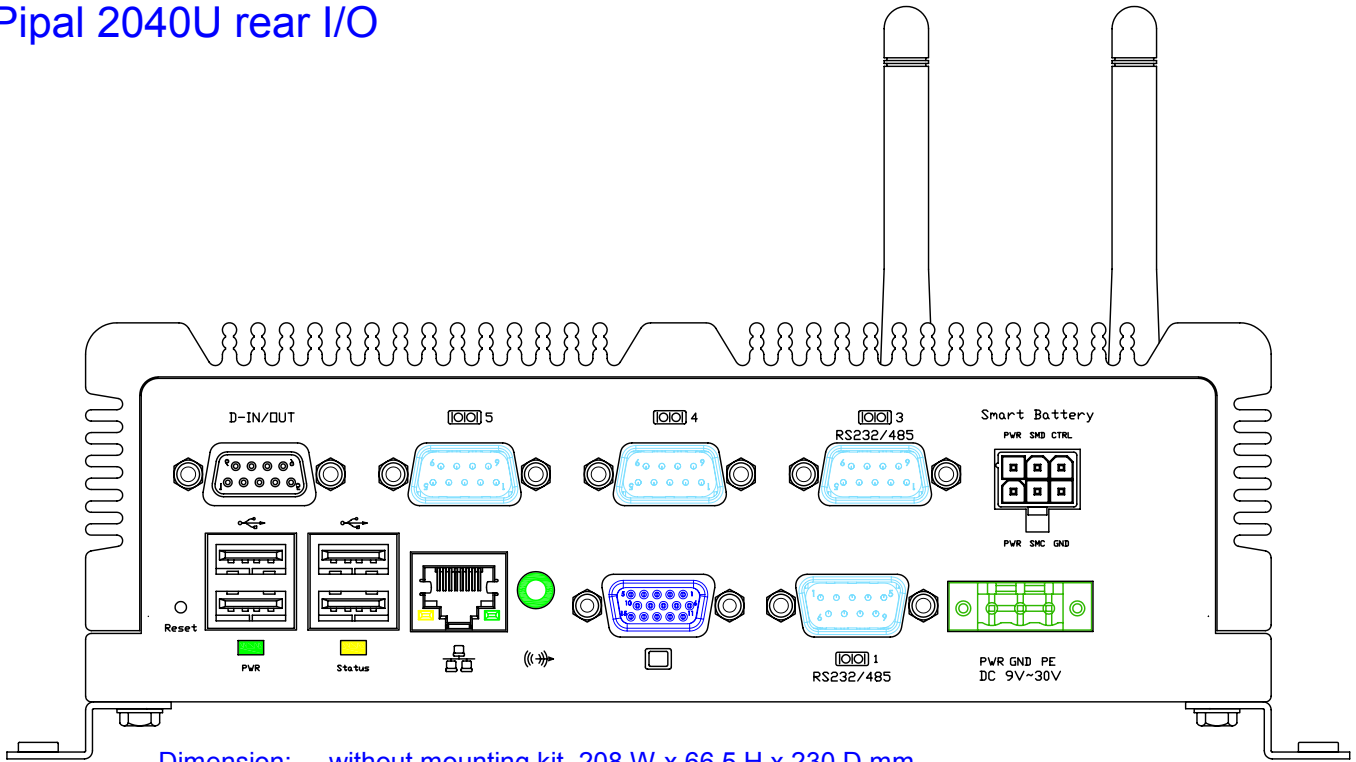

Dimension: without mounting kit 208 W x 66.5 H x 230 D mm
 with mounting kit 235.6 W x 76.5 H x 230 D mm

Pipal 2040U front I/O

